

NOX-CRETE QUICK START GUIDE

Excel 130 Sprayer

Rev: 02/2014

DO NOT USE WITH FLAMMABLE MATERIALS

Materials with a flash point below 120°F (49°C)



1. Attach black plastic cap with spray tip and clear plastic washer to the plastic CF Valve. Then attach CF Valve to brass 11/16" male fitting.



2. Lift handle to begin removal of lid.



3. Push lid towards inside of tank and turn it sideways so it can easily be removed.




4. Completely remove lid from sprayer



5. Fill sprayer with product and repeat steps 3,2, and 1 in a backwards order to fasten the lid to the sprayer.



6. Remove cap to air compressor fill valve

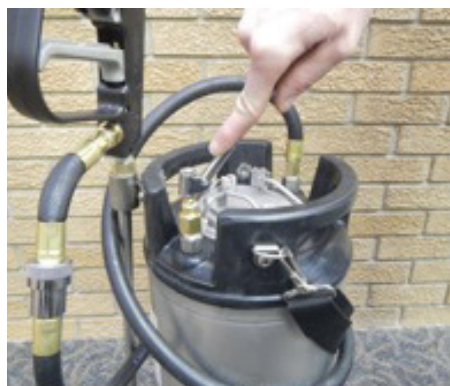

7. Use an air compressor to fully charge the sprayer. (Note**Green CF-Valve requires 43 psi to open) (Note** Yellow and Red CF-Valve requires 60 psi to open)